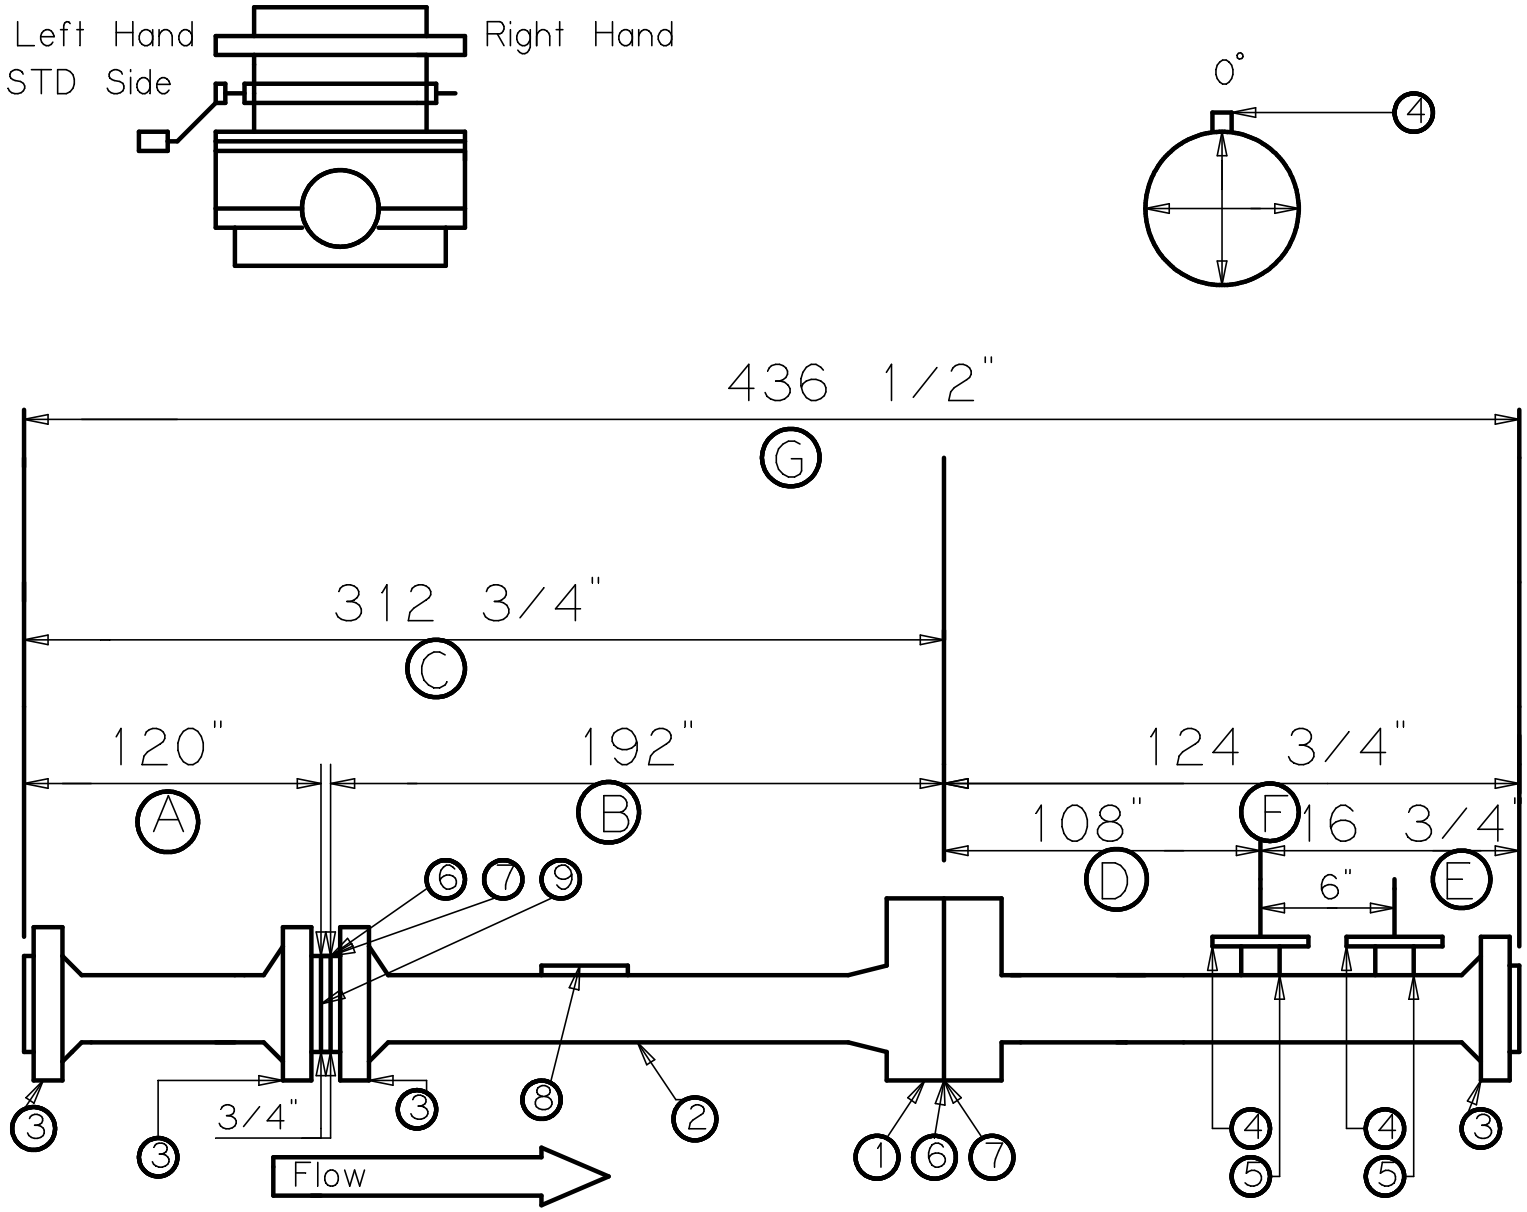

Materials List

ITEM	QTY	
1	1	24" 150 OFU SCH 20/STD
2	1	24" sch 20 A106 Gr. B Honed pipe
3	4	24" sch 20 150# RF A105N flange
4	2	1" 150# sch 40 A105N RF flange
5	2	2" X 1" sch 40 WOL A105N
6	4	24" 316SS Flex Gasket
7	2	sets of B7 / 2H studs and nuts
8	1	MMS Nameplate with meter run serial #
9	1	24"SCH 20 CPA 50E Flow Conditioner
10		
11		
12		
13		
14		
15		

NDT

Radiography 100" X-Ray		
Hydrotest	NO	
P.W.H.T.	(YES)	NO
Hardness Test	(YES)	NO
Magnetic Particle	(YES)	NO
Liquid Dye Penetrant	YES	(NO)

Notes

Manufactured in accordance with ASME B31.3

Maximum allowable hardness is HRC 22

Dimensions as per CPA recomendations

AGA 3 / API 14.3 Part 2, 4th Edition, 2000

Description

24" SCH 20 OFU AGA 2000 meter run

Standard service

A	120"
B	192"
C	312 3/4"
D	108"
E	16 3/4"
F	124 3/4"
G	436 1/2"

Miquelon Meter
9720 54th Ave
Edmonton, AB
T6E 0A9
Canada
780 434 3411

This drawing is the property of
Miquelon Meter

Description

24" 150 AGA 2000 OFU meter run

Integrated Engineering Services

Salman Rauf